


ACT-24R 2.4 GHz Digital Receiver

Features

- Industry's most compact and smallest housing. Featuring a lightweight and rugged plastic case to meet professional requirements.
- Stable digital modulation circuitry. All frequencies are located in one band. It can skip most Wi-Fi frequencies and eliminates interference from 2.4 GHz communication products.
- True diversity receiving technology eliminates signal dropout.
- A backlit graphic LCD displays various function settings.
- Pairs with new handheld and bodypack transmitters can be charged via USB Type-C. The ACT-24R can be recharged by a charging station and is easy for battery replacement.

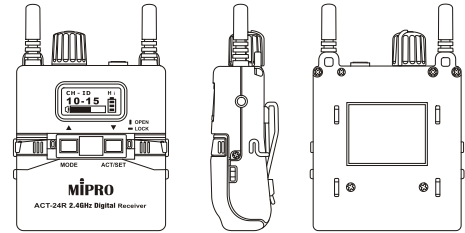

Specifications

Frequency Band	ISM 2.4 GHz (2,400 ~ 2,483.5 MHz)
Modulation Type	Digital modulation
Bandwidth	83 MHz
Receiving Mode	True diversity receiving
Display	Backlit graphical LCD
Characteristics	Latency < 4 ms, Dynamic range > 106 dBA, THD < 0.1 %.
Preset Channels	12
Transmitters	ACT-240H handheld, ACT-240T bodypack, MT-24A interlinking transmitter.
Optional Accessories	A clip and a cable
Power Supply	One ICR 18500 lithium battery
Charger	MP-24-4, MP-8 One-slot Charging Station.
Dimensions	63 × 85 × 26 mm (W×H×D)
Weight	Approx. 84 g
Note	Refer to the actual product in the event of product discrepancy.