


MT-24A ISM 2.4 GHz Digital Interlinking Transmitter

Features

- EIA standard 1/2 U. The MT-24A can connect the outputs of microphones, instruments and other audio equipment with switchable input Mic/Line level. It presets 12 channels and 16 ID codes, switchable high (< 100 mW) and low power (< 10 mW), and supplies +48 V phantom power for condenser microphones. It is used to pair with the ACT-2400 Series receivers for long-distance wireless transmission.

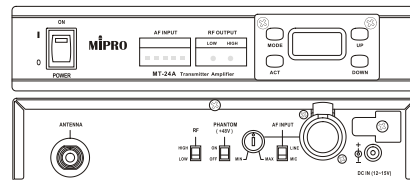

Specifications

Frequency Band	ISM 2.4 GHz band.
Modulation Type	Digital modulation
Receivers	ACT-2400 Series receivers
Adaptor	XLR & Ø 6.3 mm combo jack
Power Supply	12 ~ 15 V DC
Dimensions	210 × 44 × 203 mm (W×H×D)
Weight	Approx.1.1 kg
Note	Refer to the actual product in the event of product discrepancy.