



Univox[®] DBC

Direct Burial Cable


Features

- Improved protection against corrosion
- Rubber insulation
- Diameter 4.5mm
- Cross section 2.5mm²
- Voltage rating type 4C (600/1000V)
- 100m and 200m drum

Corrosion protected cable for concrete encasement

DBC, Direct Burial Cable for hearing loops is a cable especially suited for concrete encasement, immune to the corrosive effects of the concrete. Normal cable with PVC insulation cannot be used for burial in concrete as the hostile environment may lead to failure of the loop over time.

This specialised cable with more durable rubber insulation offers improved protection compared to standard PVC cables and fulfils the provisions of the BS 6195:2006 standard.

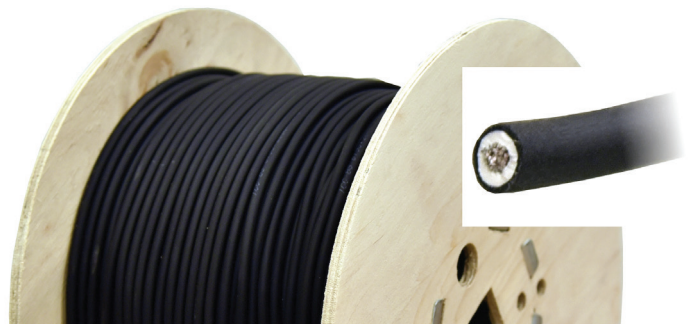

Copyright © Bo Edin AB

Technical data

Material	Insulation: Ethylene Propylene Rubber (EPR), heat and oil resistant and flame-retardant (HOFR), black Sheath: Chlorosulphonated Polyethylene (CSP), white
Voltage rating	Type 4C (600/1000V)
Diameter	4.5mm
Cross section	2.5mm ²
Packaging	Drum with wooden flanges
Length	100m and 200m
Weight	5.35 and 9.85kg
Part no	
861090	DBC, Direct Burial Cable, 2.5mm ² , 100m drum
861092	DBC, Direct Burial Cable, 2.5mm ² , 200m drum

For complete manual, please refer to univox.eu.

CE